


---

## To install your Access 211 VoIP Gateway with a home network:

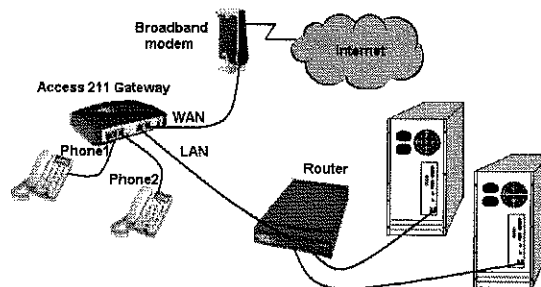

1. Unpack the Access 211 Gateway unit.  
Place the Gateway on a desktop or other level surface, or mount it on a wall. Choose a location that is near the devices to be connected and close to an electrical outlet.
2. Connect the WAN port on the Gateway's rear panel to the Ethernet socket on your broadband modem with the Ethernet 10/100BaseTX (RJ-45) cable that was provided with your modem.
3. Connect the LAN port on the Gateway's rear panel to an open Ethernet WAN port on your router with a supplied Ethernet 10/100BaseTX (RJ-45) cable, in accordance with the instructions provided with your router.
4. Connect the phones to the Phone1 and Phone2 ports on the Gateway rear panel with RJ-11 Phone cables (if your provider enables only one phone line, connect the phone to the Phone1 port).
5. Verify that all system components are properly installed. Make sure that all cable connectors are securely positioned in the appropriate ports.
6. Connect the power adapter to the power connector of the unit and to the power source.
7. Check that the **Power** LED on the Gateway front panel glows steadily.
- 8a. If you are using a DSL modem, you will need to enable PPPoE on the Gateway and disable PPPoE on your router. To enable PPPoE on the Gateway see [step 9a](#) in the instructions for installing your Access 211 VoIP Gateway with a single PC.
- 8b. If you are using a cable modem, note that some cable modems need to be power cycled after being connected to the Gateway. For such modems you can also power cycle the Access 211 Gateway for faster connection.
9. Wait for the **Voice** LED on the Gateway front panel to glow, indicating connection to your Internet and VoIP providers. It may take a minute or two for these connections to be established.
10. Reset your router and verify that your broadband modem and your router are working. Verify that your broadband Internet service functions properly.
11. Pick up the phone on each line to verify that you can hear the dial tone. If no dial tone is heard, refer to the *Troubleshooting* section in the *Access 211 VoIP Gateway (AC-211) User Guide*.

Once the installation is complete, you can use your Access 211 Gateway for telephone calls and for the Internet, assuming that you have a connection supplied by your VoIP provider.

If any problems are experienced during the installation of the unit, please contact your local vendor.